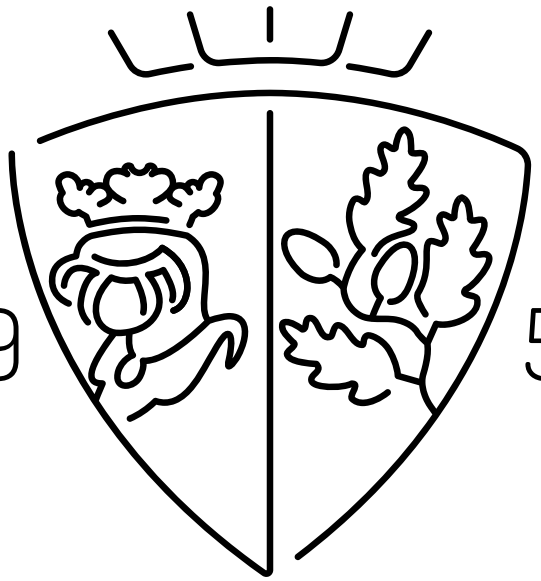

GALEKOVIĆ

quality in tradition

CATALOGUE

In his lifetime a man walks
an average of **200 000 000 steps**,
treat your steps with
the best flooring.

Braće Radića 199a, 10410 Velika Gorica (Mraclin), Croatia
+385 1 5590 840 | prodaja@pps-galekovic.hr | galekovic.hr

TABLE OF CONTENT

SOLID FLOORING	04
ENGINEERED FLOORING	08
CHEVRON & HERRING BONE	14
DECKING	19
FACADE	22
COLORS	24
CERTIFICATES	25

SOLID FLOORING

DUX

THICKNESS // 10;14 mm

WIDTH // 50;70 mm

LENGTH // 350-600 mm

FINISH // LAK / VARNISH

WOOD TYPE //
OAK
ASH
THERMO ASH
BEECH
THERMO BEECH
CHERRY
HORNBEAM

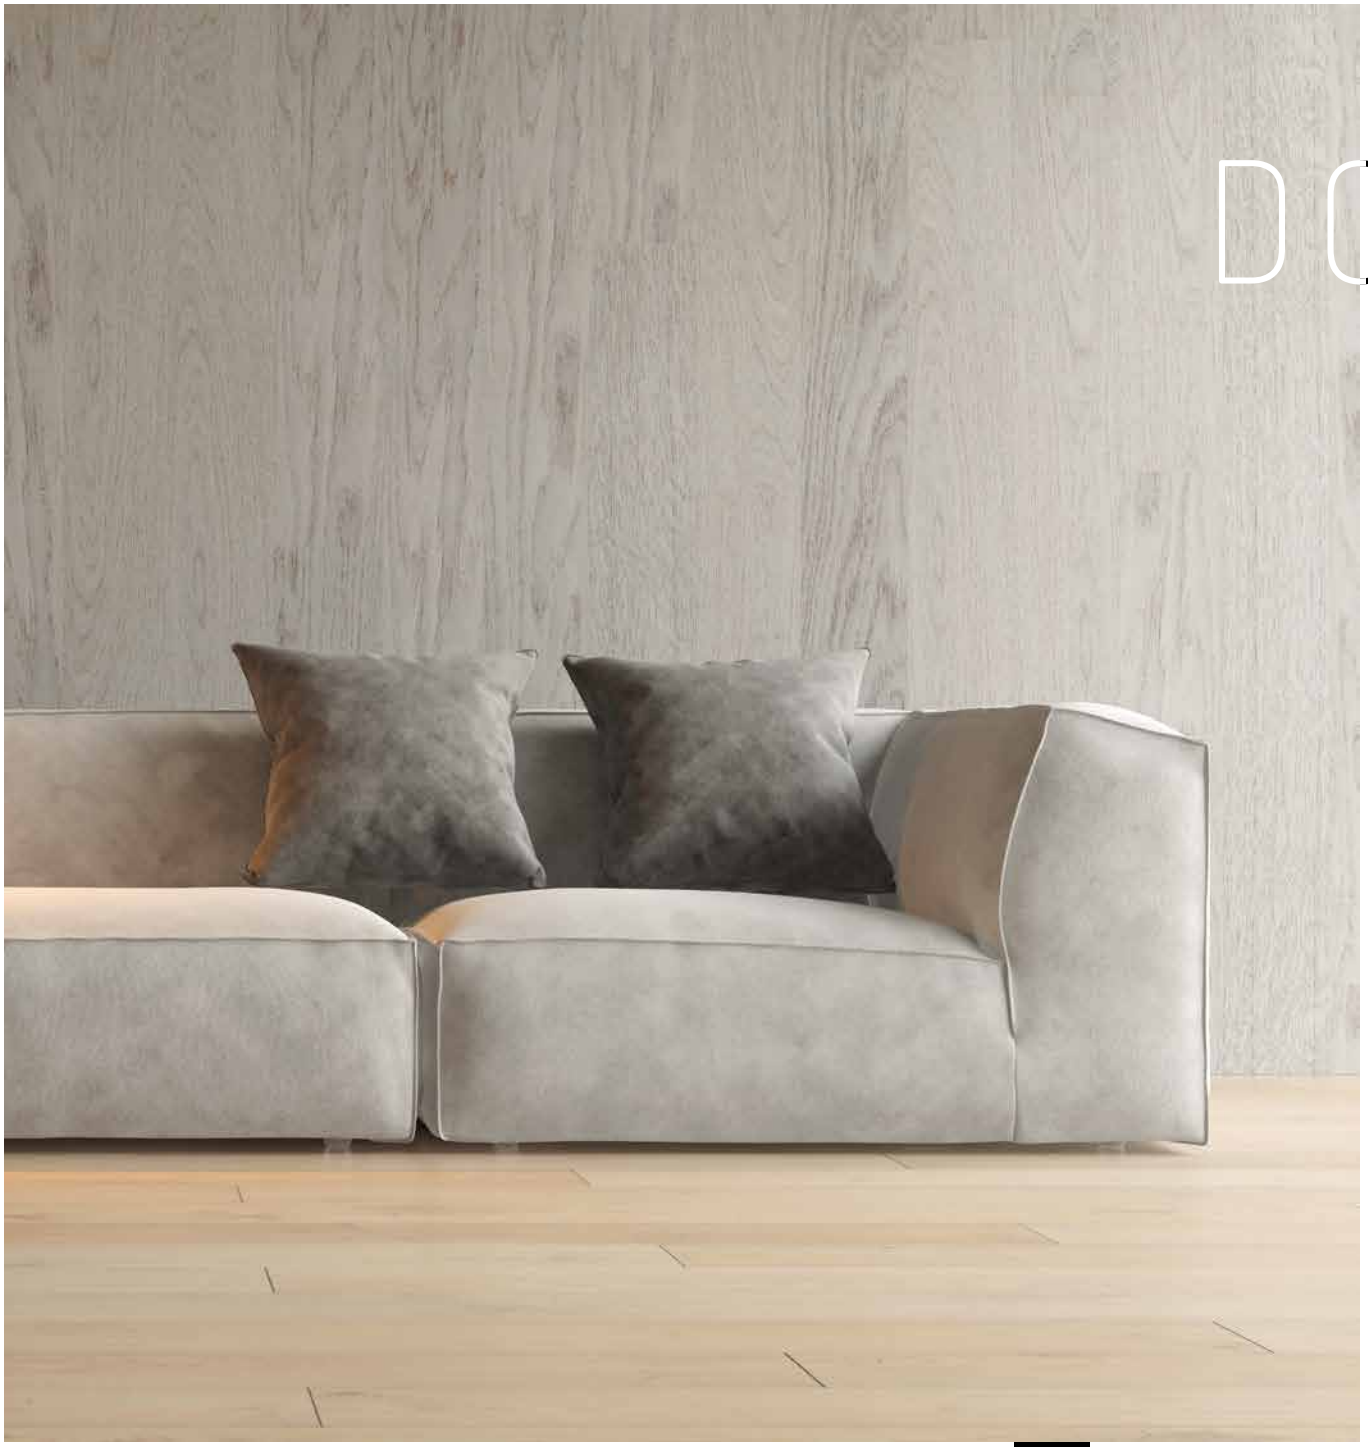

DOMINUS

THICKNESS // **14 mm**

WIDTH // **90 mm**

LENGTH // **450-1200 mm**

FINISH // **VARNISH / OIL / BRUSHING**

WOOD TYPE //
OAK
THERMO OAK
ASH
THERMO ASH
BEECH
THERMO BEECH
CHERRY
HORNBEAM
THERMO HORNBEAM

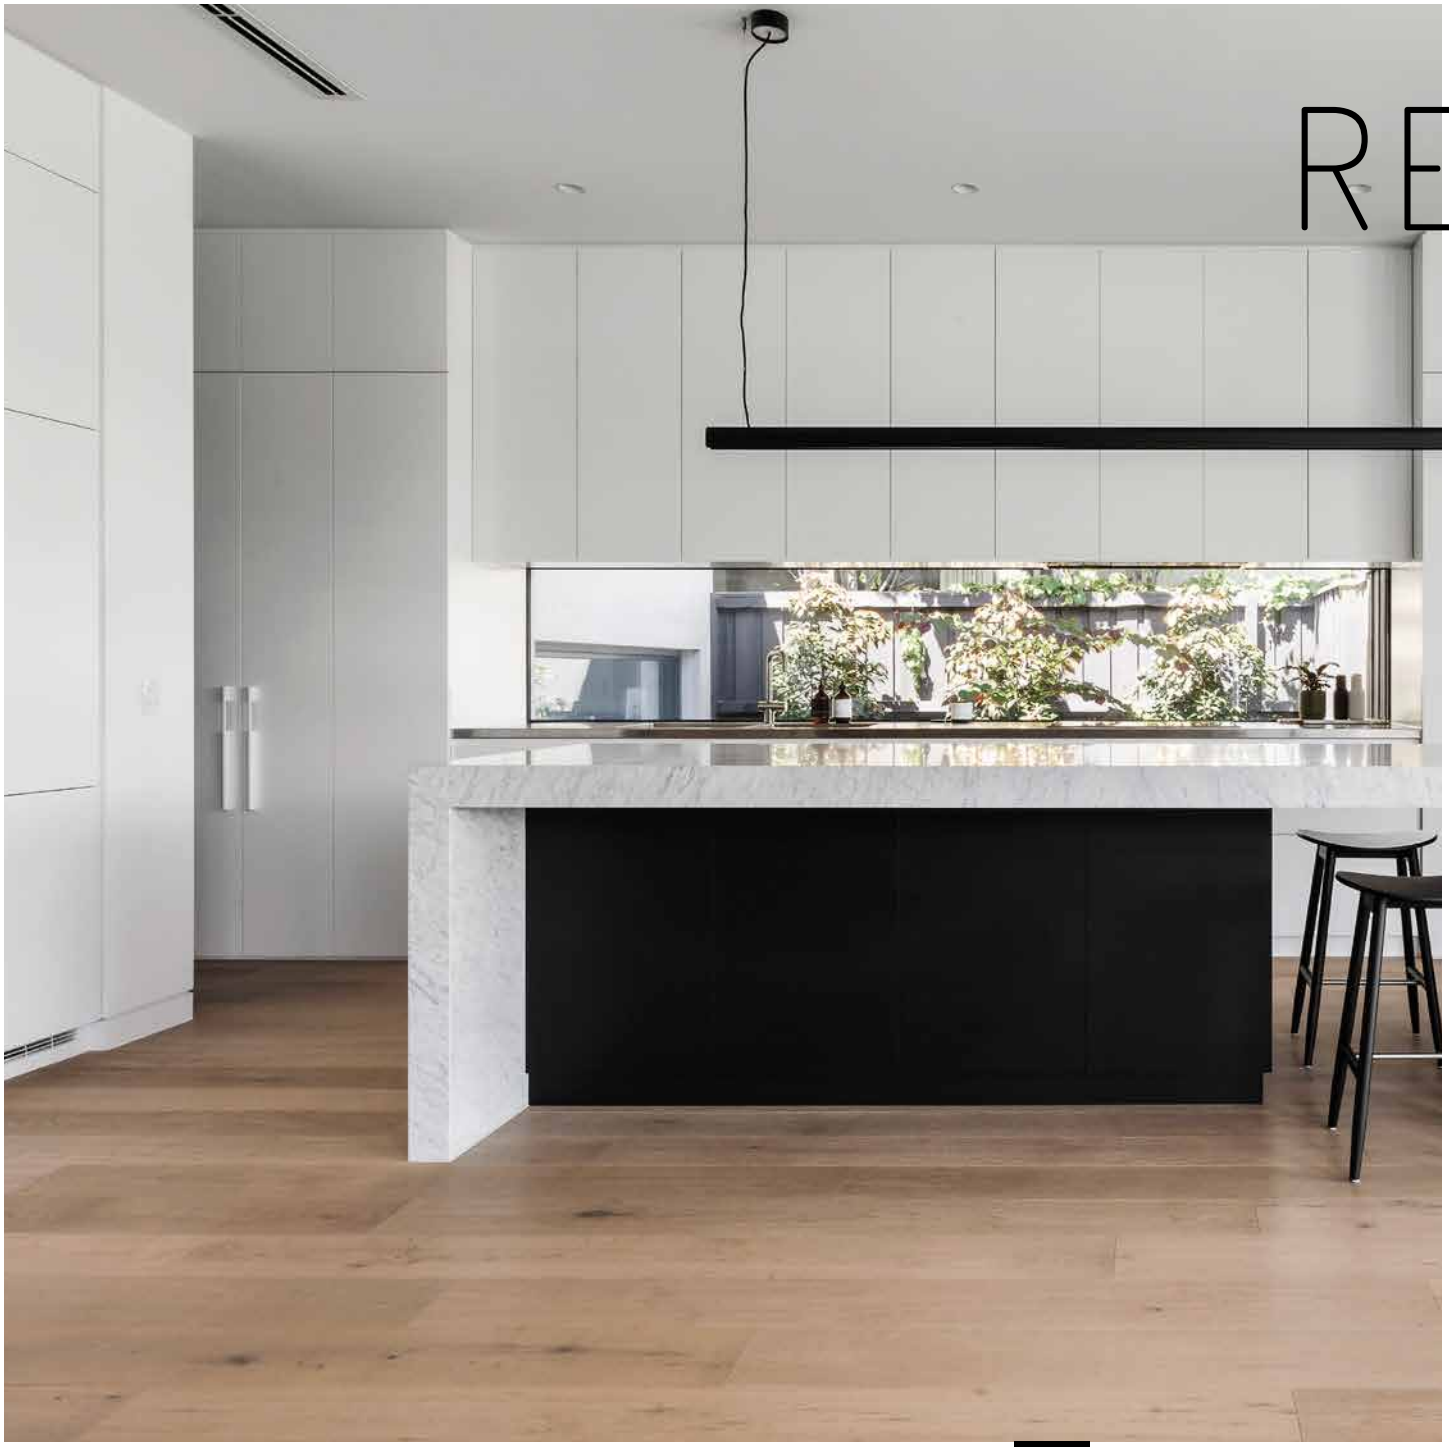

REGIUS

THICKNESS // 14;21 mm

WIDTH //
120;140;160 mm (14 mm)
120;140;160;180;200 mm (21 mm)

LENGTH // 400-2400 mm

FINISH // VARNISH / OIL / BRUSHING

WOOD TYPE
OAK
THERMO OAK
ASH
THERMO ASH
BEECH
THERMO BEECH
HORNBEAM
THERMO HORNBEAM

ENGINEERED FLOORING

ENGINEERED FLOORS WITH HIGH QUALITY HARDWOOD TOP LAYER
GLUED TO A PLYWOOD OR 2 LAYER SOLID WOOD BASE

MULTIFLOORING

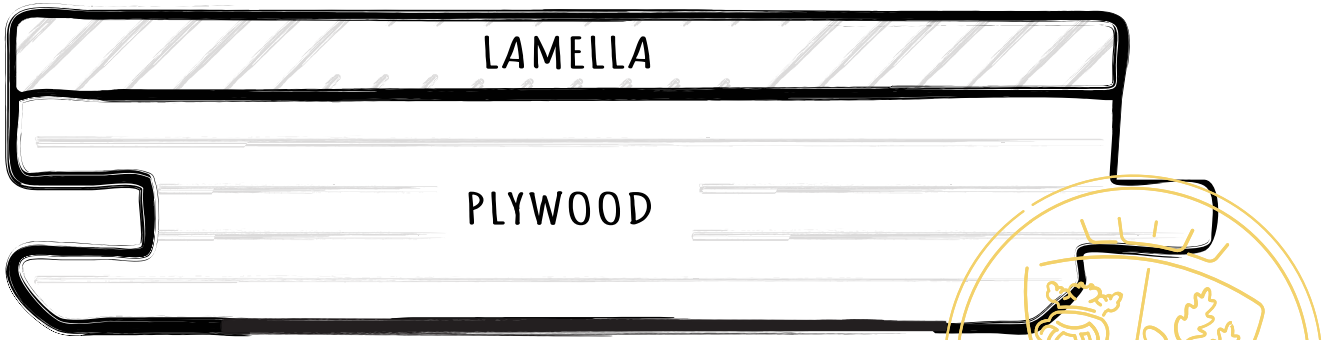

THICKNESS // 11;15 mm

LAMELLA // 3,6 mm

WIDTH // 120;140;160;180;200;220 mm

THREE LAYER FLOORING

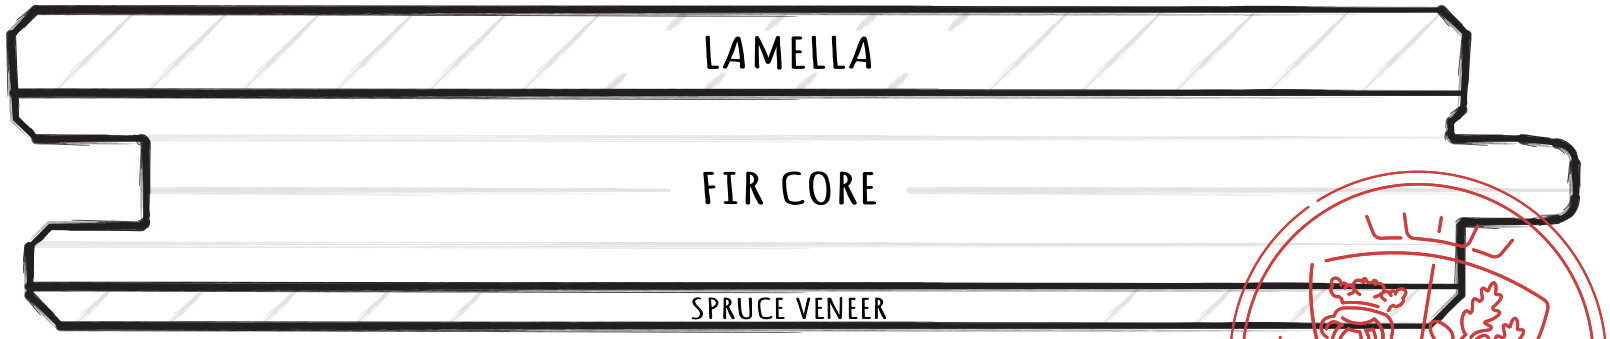

THICKNESS // 14,5 mm

LAMELLA // 3,6 mm

WIDTH // 120;140;160;180;200;220 mm

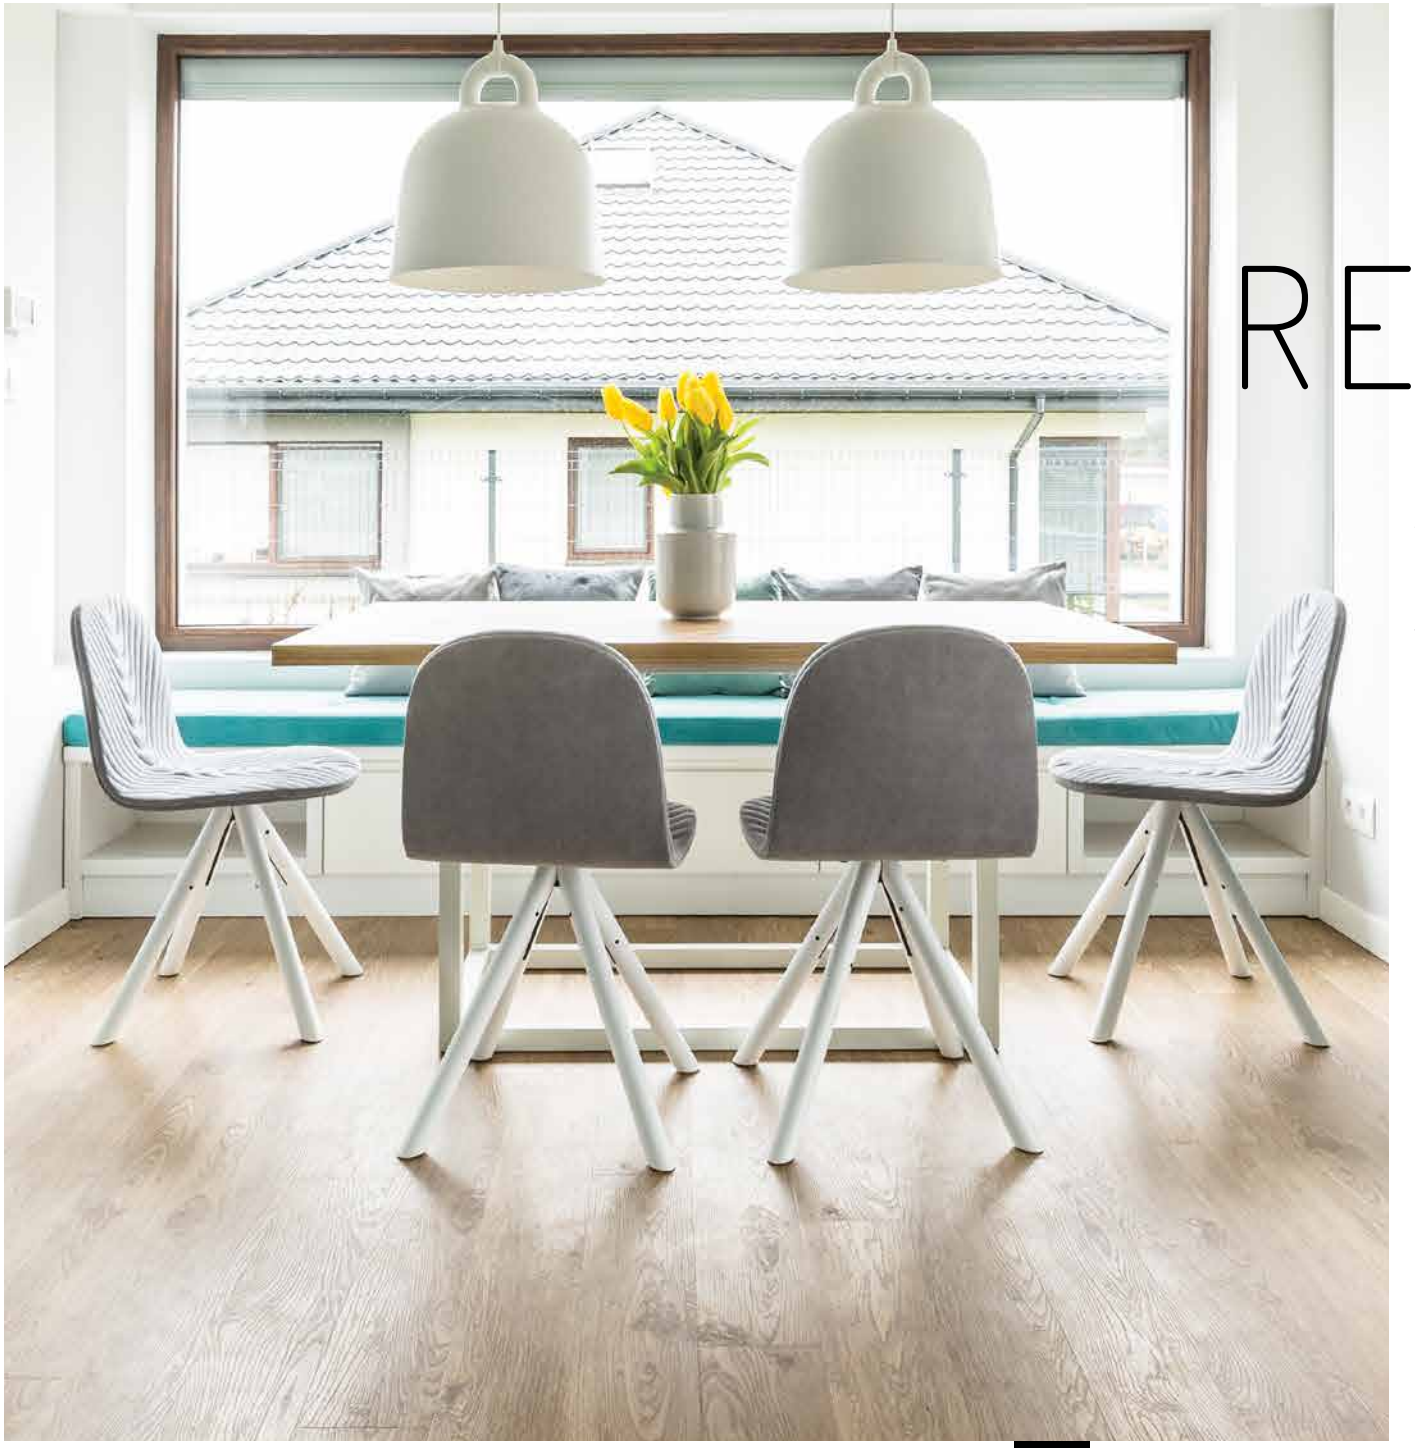

REGULAR

THICKNESS //
MULTIFLOORING 11;15 mm
THREE LAYER FLOORING 14,5 mm

WIDTH // 120;140 mm

LENGTH // 400-2200 mm

STYLISH

THICKNESS //

MULTIFLOORING 15 mm

THREE LAYER FLOORING 14,5 mm

WIDTH // 160 mm

LENGTH // 600-2400 mm

ELEGANCE

THICKNESS //
MULTIFLOORING 15 mm
THREE LAYER FLOORING 14,5 mm

WIDTH // 180;200;220 mm

LENGTH // 600-2400 mm

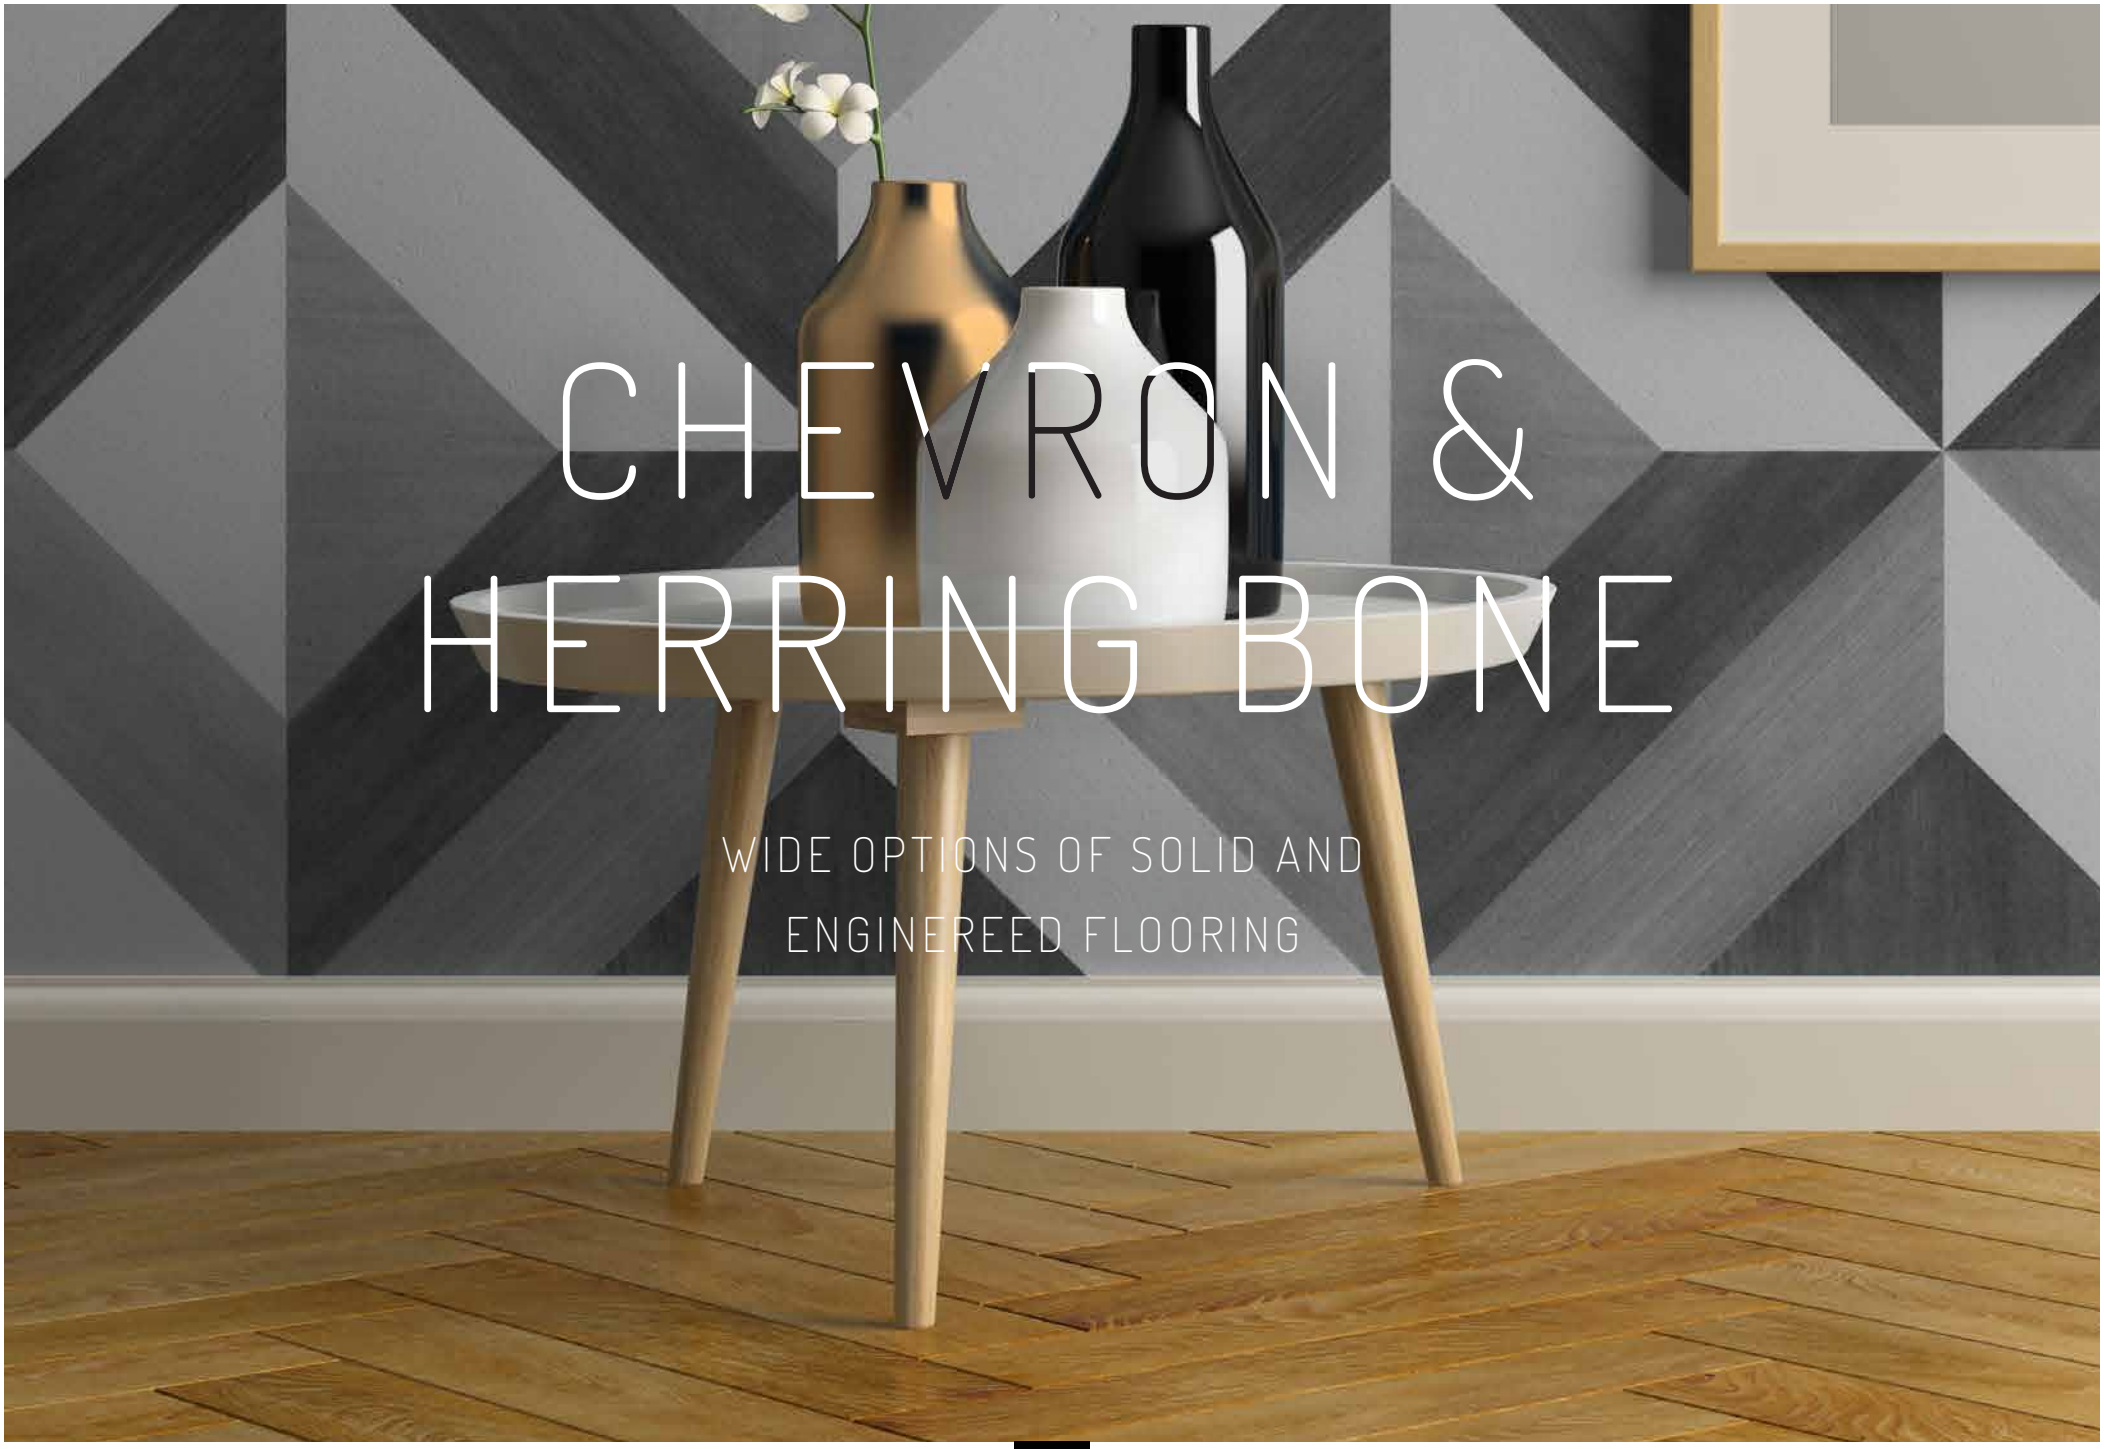

CHEVRON & HERRING BONE

WIDE OPTIONS OF SOLID AND ENGINEREED FLOORING

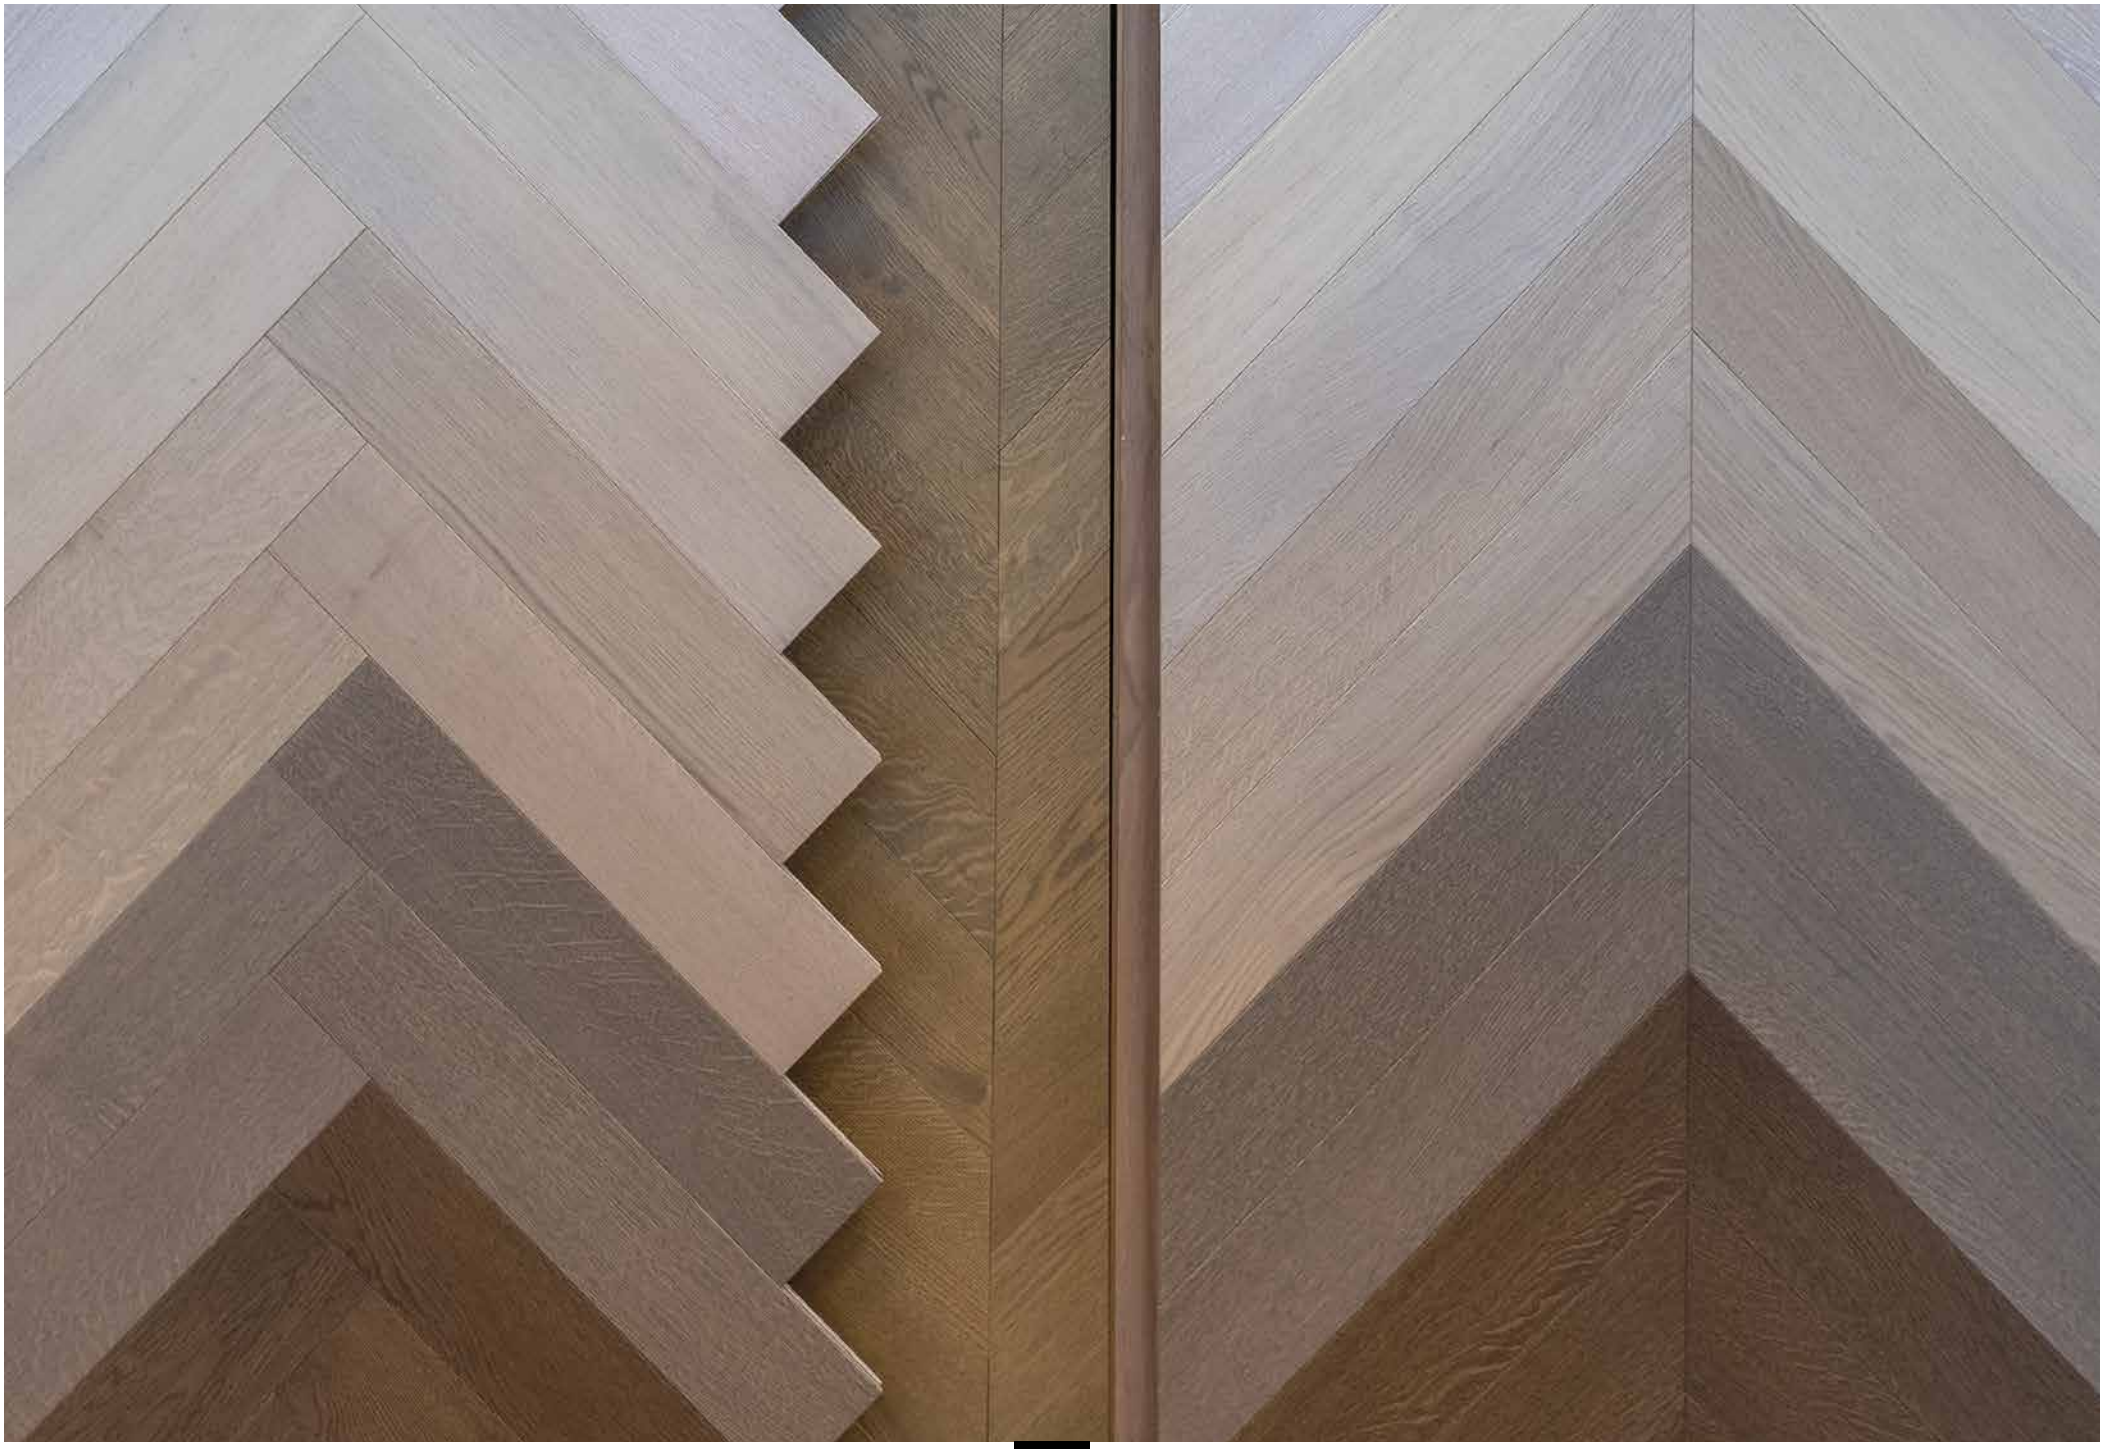

HERRING BONE

CHEVRON

CHEVRON

SOLID PARQUET

THICKNESS // 14 mm
WIDTH // 50-140 mm
ANGLE // 45°;60°

MULTIFLOORING

THICKNESS // 15 mm
WIDTH // 120-140 mm
ANGLE // 45°;60°

HERRING BONE

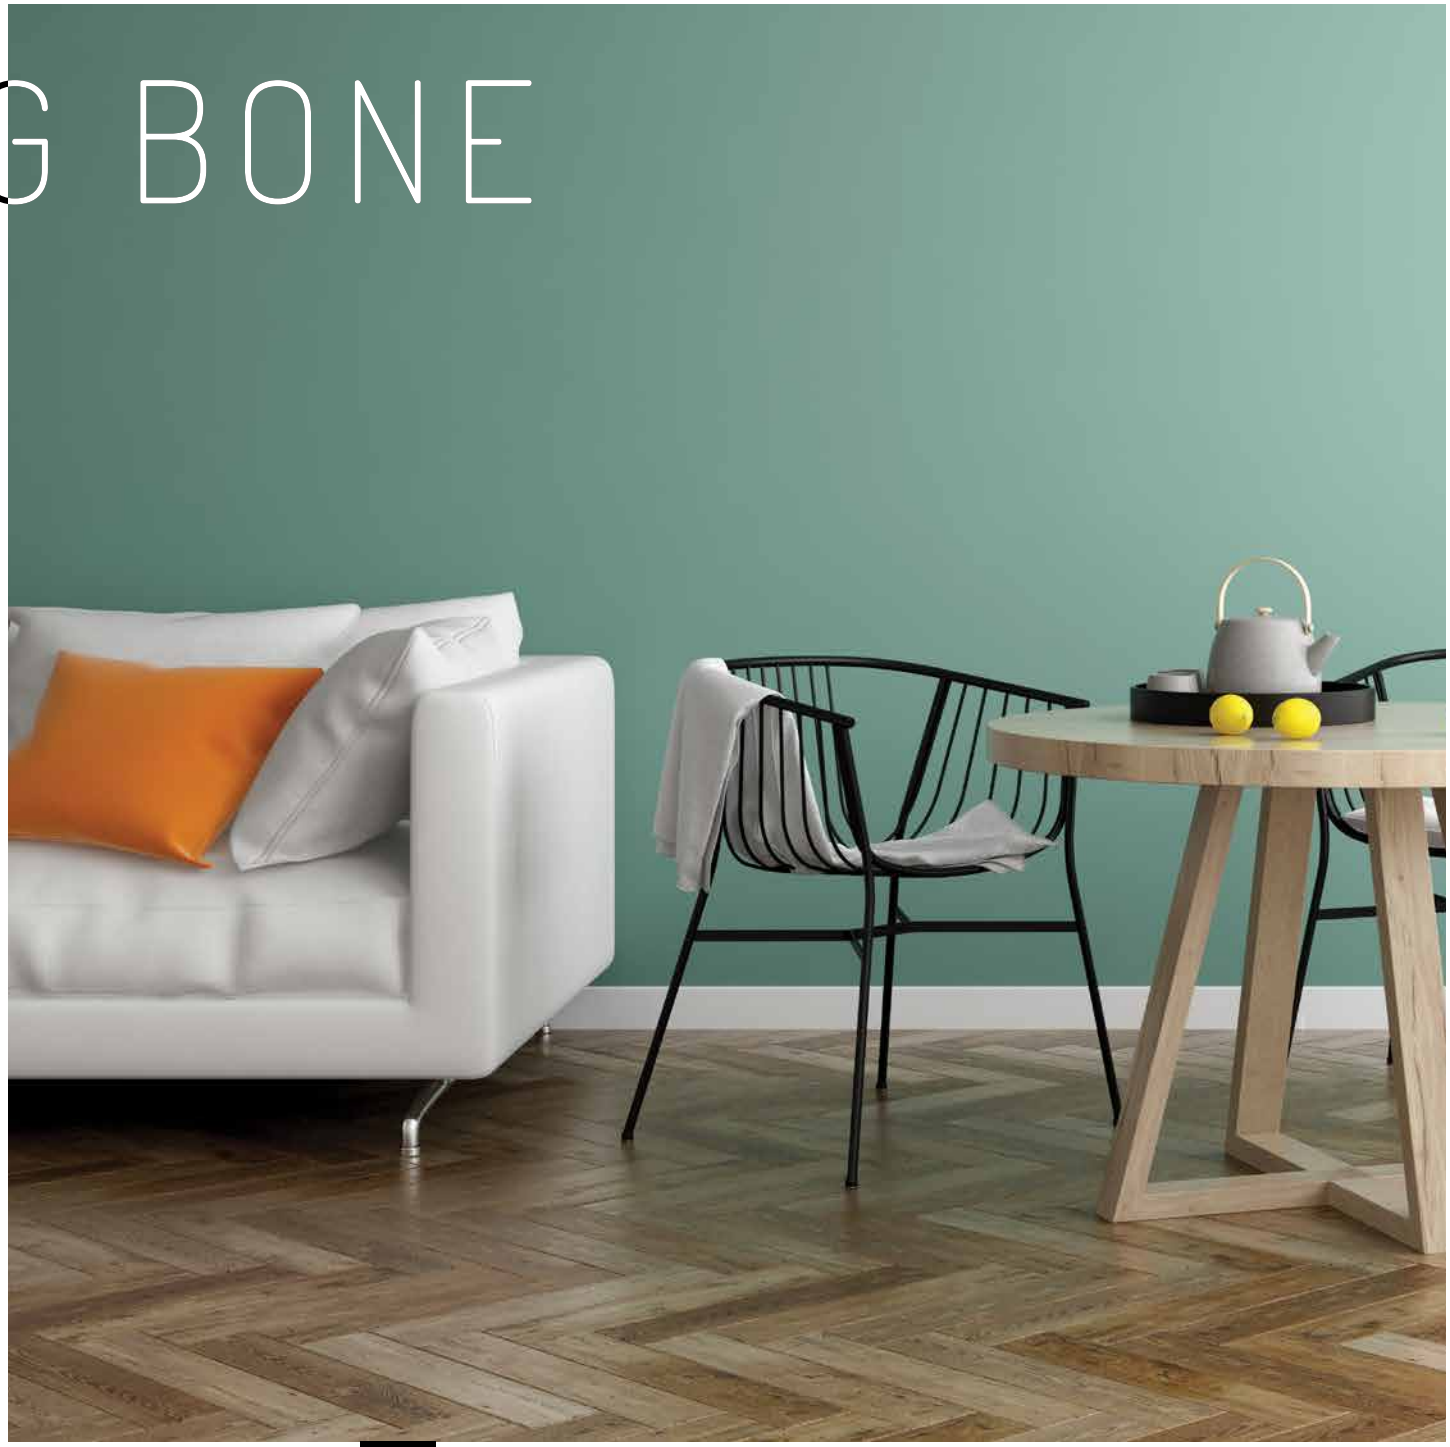

SOLID PARQUET

THICKNESS // **14 mm**
WIDTH // **50-140 mm**

MULTIFLOORING

THICKNESS // **11;15 mm**
WIDTH // **120-140 mm**

THREE LAYER FLOORING

THICKNESS // **14,5 mm**
WIDTH // **120-140 mm**

DECKING

THERMALLY PROCESSED 21 MM THICK ASH (CONTROLLED PYROLYSIS AT 200°C)

DECK

THICKNESS // 21 mm

WIDTH // 90;120;140 mm

LENGTH // 900-2400 mm
FINGER JOINTED 3000≤ (120;140 mm)

WOOD TYPE // THERMO ASH

CHESS

THICKNESS // 30 mm

WIDTH // 550 mm

LENGTH // 550 mm

WOOD TYPE // THERMO ASH

BARCODE

THICKNESS // 50 mm

WIDTH // 710 mm

LENGTH // 300;600;900 mm

WOOD TYPE // THERMO ASH

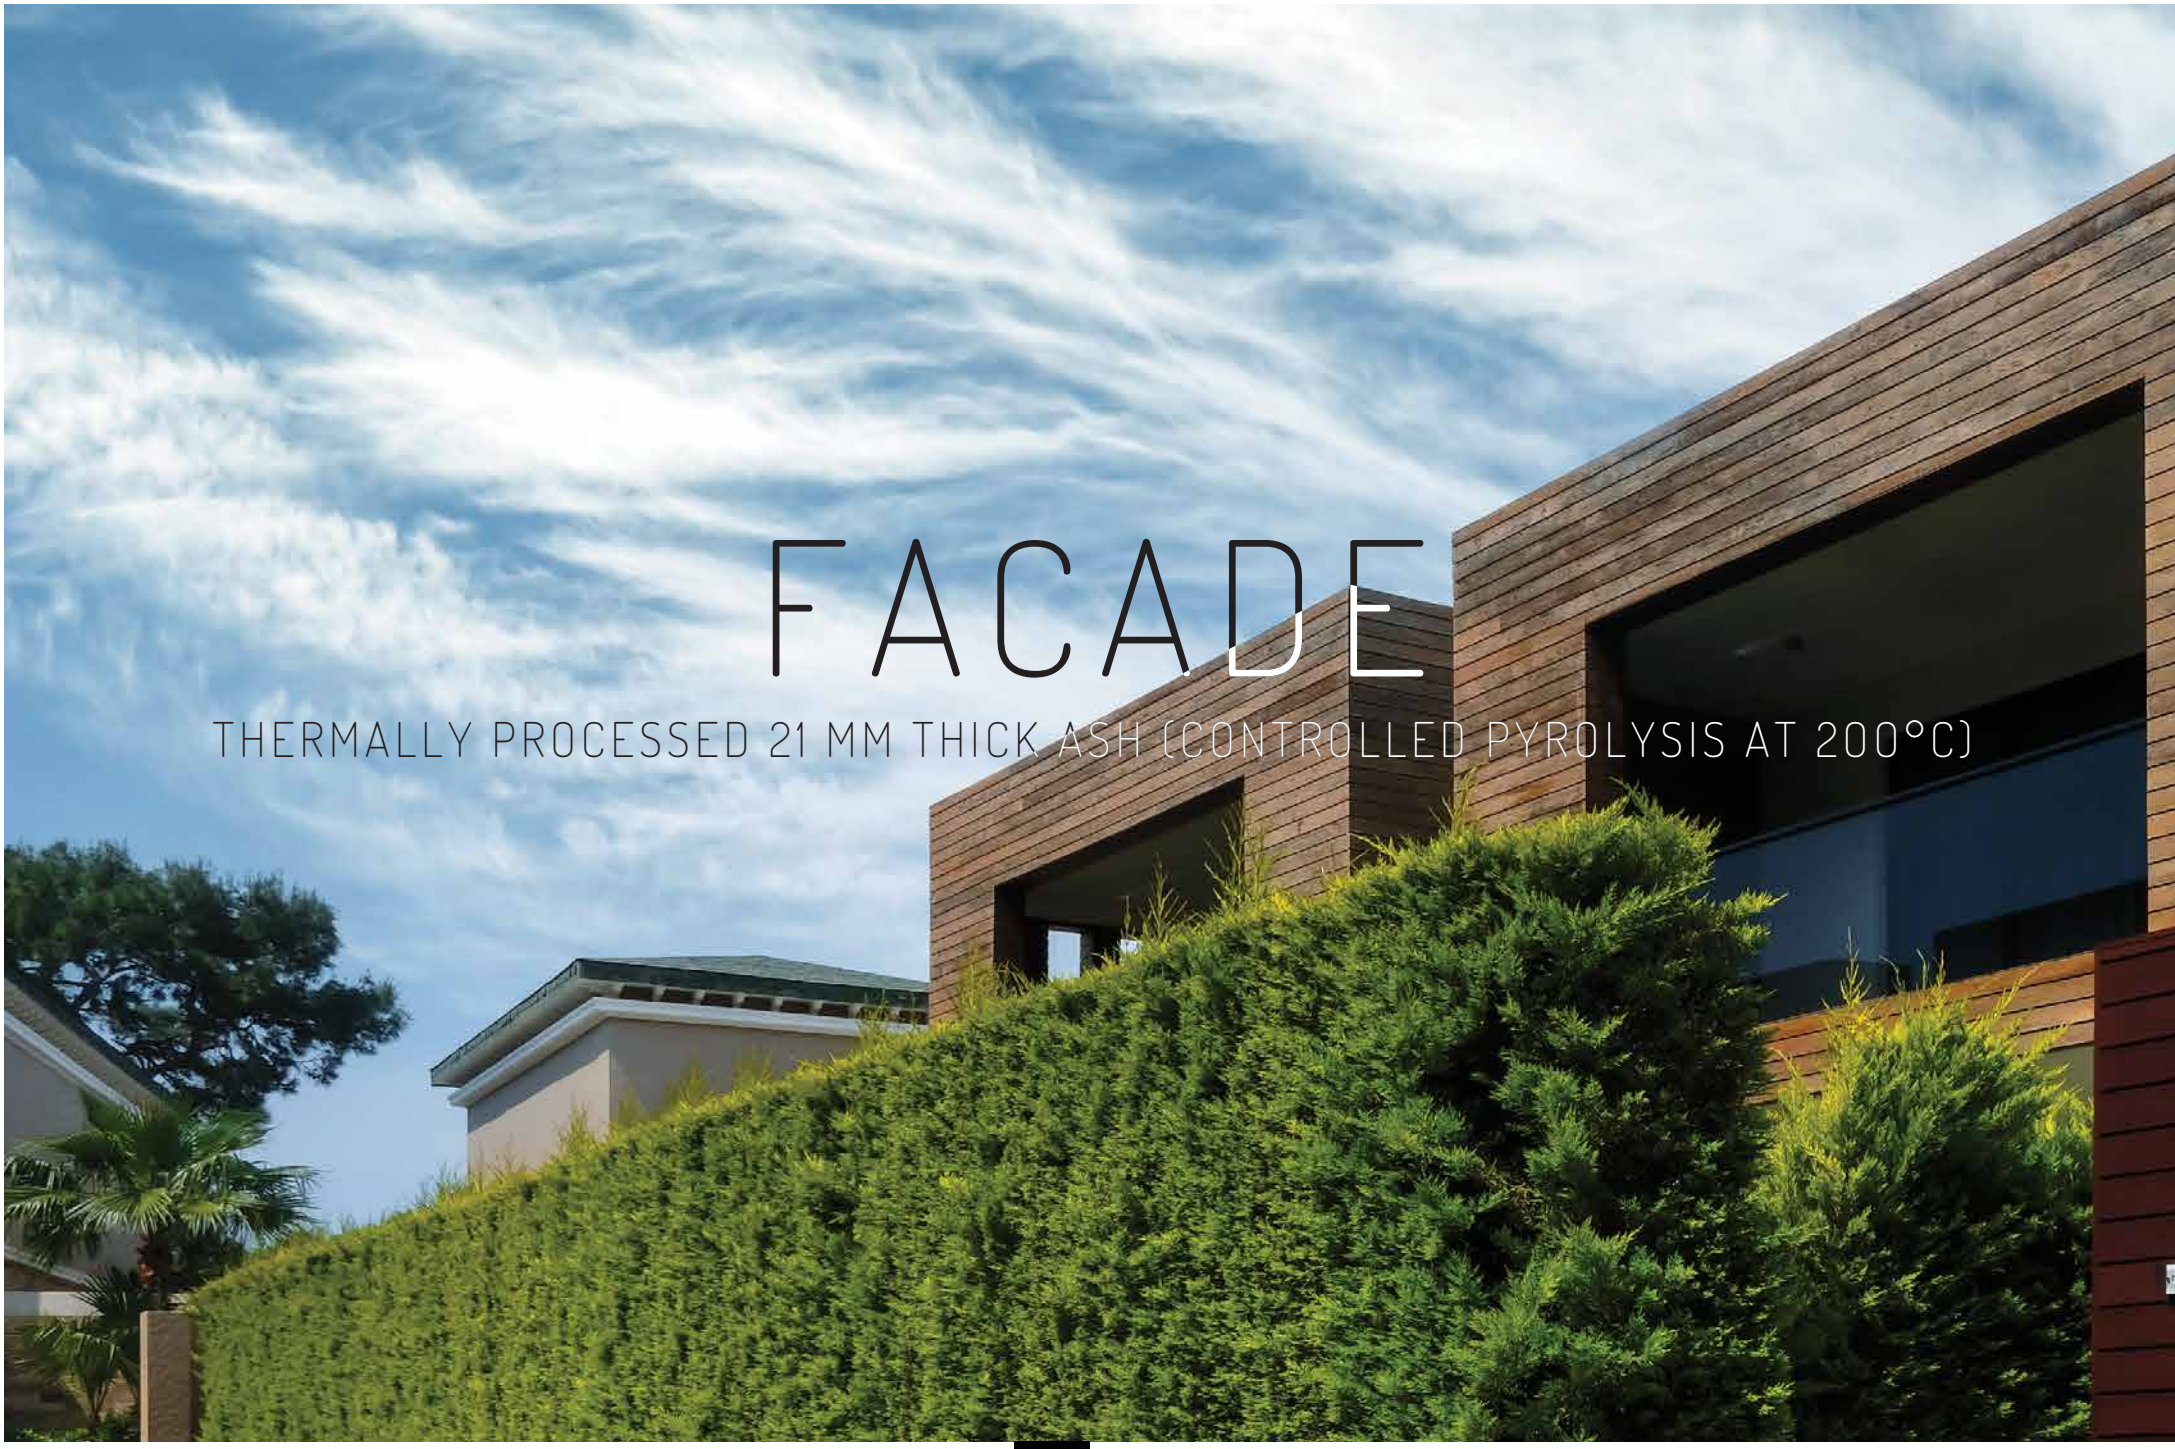

FACADE

THERMALLY PROCESSED 21 MM THICK ASH (CONTROLLED PYROLYSIS AT 200°C)

FACADE

THICKNESS // 21 mm

WIDTH // 90;120;140 mm

LENGTH // 900-2400 mm
FINGER JOINTED 3000≤ (120;140 mm)

WOOD TYPE // THERMO ASH

COLORS

Varnish:

Oak original

Stone

Invisibile

White

Armagnac

Fume

Chocolate

Marble oak

Smoked oak

Polar

Pure white

Thermo oak

Ochre gold

Thermo oak white

Dark chocolate

Cream

Oil:

Dark

Smoked oak


Havana

Invisible

Iron

Oyster

Papyrus

Silver

Smoke

Thermo oak

Ash:

Ash

Ash white

TT ash

CERTIFICATES

19 56

GALEKOVIĆ

quality in tradition

Braće Radića 199a
10410 Velika Gorica (Mraclin)
Croatia

Tel: +385 1 5590 840

prodaja@pps-galekovic.hr
galekovic.hr